

## Lamp&Socket Lamp

Lamp&Socket

## This package contains:

- Lamp&Socket Lamp:
   blue porcelain lamp
- 3m electrical cable (color grey-white-green)
- 2,5m metal support wire incl. fixation for loop ceiling screw eye
- fitting
- 4 watt cfl lamp, or special LED lamp on request

## Lamp&Socket lamp information:

- for indoor use and dry space only
- ceiling usage
- always turn the light switch to an off position when fitting or changing a bulb
- connect to 220-240V AC only
- always use the correct type of bulb and wattage. Never exceed the wattage stated above
- installation of the lamp shall be done by a qualified person
- varify that the electric box that houses the wiring connections in the ceiling can support the weight of the lamp (approx. 0,5kg)
- make sure there are no other wires running through the place where the lamp will be hung
- the ceiling hook should have the appropriate size and length in order to support the weight of the lamp
- when changing a bulb, always switch off at the mains and allow the old bullb to cool down before handling. Dispose of used bulbs carefully.
- if the external cable of this luminair is damaged, it shall be exclusively replaced by any qualified person in order to avoid a hazard.
- the Lamp&Socket lamp should not be adapted or modified in any way.

## Instructions:

- carefully unpack the carton
- cut power supply before installing the lamp
- attach the steel cable to the ceiling screw eye, adjust the length and cut off the remainder of the cable, make sure the steel cable is always shorter than the electrical cable. Make sure there is no tension on the electrical cable between the ceiling connection and the socket.
- carefully tuck the brown supply wire at one end of the terminal box and the brown fixture wire at the other end. Repeat this procedure for all wires.
- make sure that all wires are fixed by turning the screws in the terminal
- fit the bulb type/wattage as indicated on the luminaire (Max. 9W). The wattage indicated, must not be exceeded
- connect the lamp to the power supply. The voltage should be within 220-240V
- switch on the lamp

You can also connect a plug to the lamp and use the plug to connect the lamp onto a multiple socket or a votage rail. Always make sure you do not use more watt then the socket can handle.


We recommend cleaning porcelain parts with a soft, dry cloth. Do not use abrasive cleaning materials. We strictly discourage to clean the porcelain parts with a wet cloth to avoid any possible contact with electrical power! If you can't clean the porcelain anymore with a dry cloth, then remove the porcelain part from the technical part. For this the porcelain part needs to be disconnected from the inside, fitting and electrical cord. The porcelain part can then be cleaned in a dishwasher. Only when it's completely dry, the porcelain part can be put back again on the inside, fitting/socket and electrical cord.

Light colored elextrical cords are susceptible to stains on contact. Stains on cords are not covered by the warranty. Electrical cords may get dusty. Use a soft clean brush onto a vacuum cleaner to remove dust. In case the porcelain damages due to improper use, the porcelain part can be ordered separately.

Studio Lotte Douwes can not be held responsible for improper use of the safety instructions or installation of the Lamp&Socket lamp other than indicated by the instructions of this information sheet.

Hang het staalkabeltje aan de haak in het plafond.
Zorg ervoor dat je de juiste plug gebruikt voor de kracht van het uittrekken van een stekker uit het stopcontact en het gewicht van de lamp.

Hang the metal wire onto the ceiling hook. Make sure you use the right plug to carry the force of pulling a plug out of the socket and the weight of the lamp.

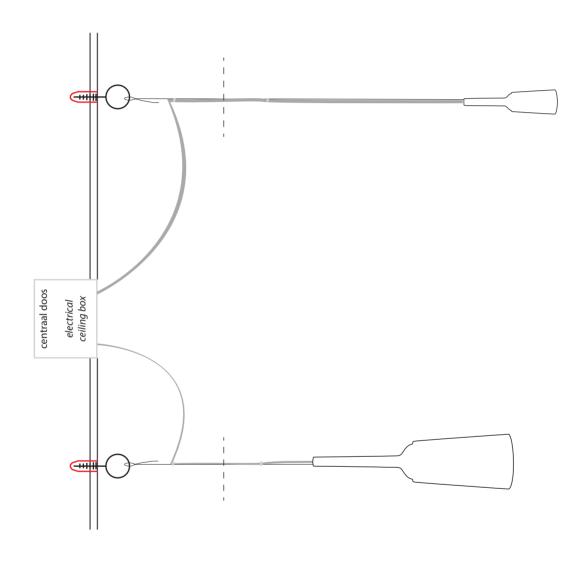

Studio Lotte Douwes Keilestraat 5a NL-3029BP Rotterdam the Netherlands

+31 6 22337638

info@lottedouwes.nl www.lottedouwes.nl